


SPOTLIGHT TYPE HA-SW 1

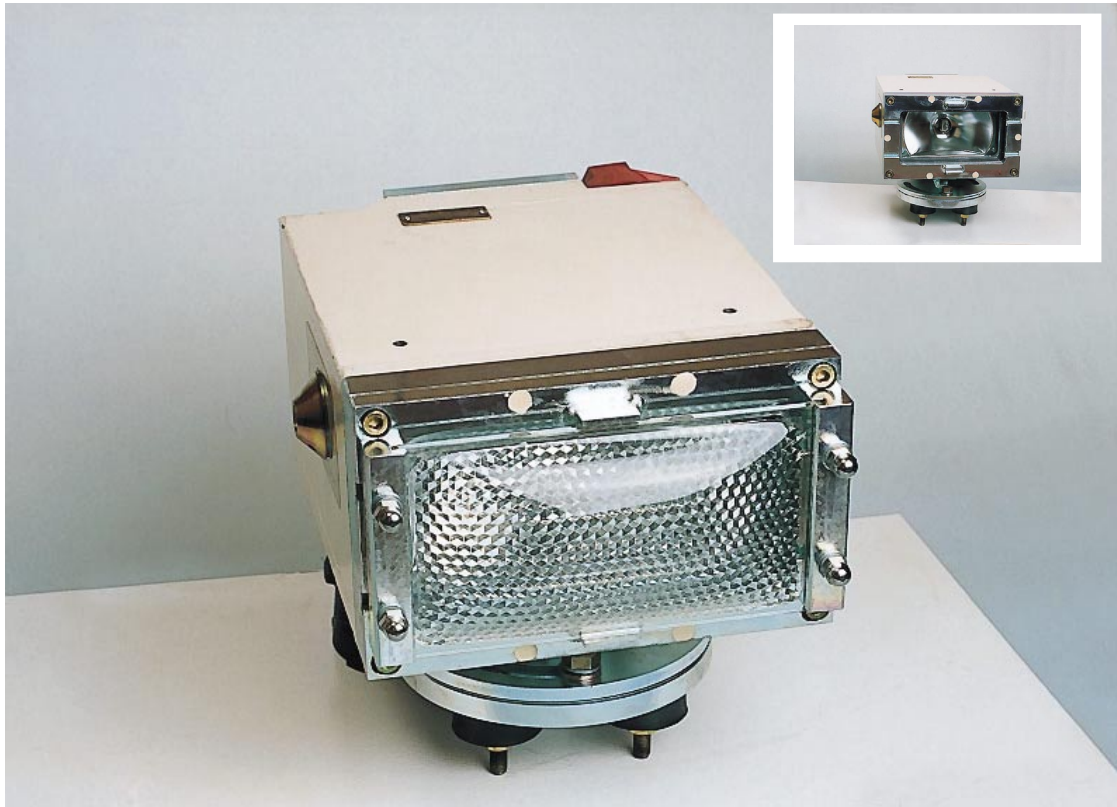

Features

- Adjustable light distribution (spotlight / wide area)
- High illumination level due to halogen bulb
- Bulb protected against impacts and with startup current surge limiter
- Each type available for two operating voltages
- Isolating transformer
- Easy to change the fuse and the bulb
- Plug-in type cable quick-connectors HA-LSA 4
- Diffuser and protective lens covers to prevent dazzling and protect against impacts can be attached
- Can be supplied with rotating and swivelling console and vibration dampers for special requirements

Technical Data

- | | |
|---------------------------------|--------------------|
| • Designed operating voltage | 42...1000 V* |
| • Designed frequency | 50-60 Hz |
| • Nominal rating | 110 VA |
| • Switching capacity of fuse | 15 kA |
| • Clampable cable cross-section | 10 mm ² |
| • Ambient temperature | ≤ 40 °C |
| • Weight approx. | 33 kg |
| • Dimensions | |
| - Height | 161 mm |
| - Height incl. console | 279 mm |
| - Width | 262 mm |
| - Depth | 385 mm |

*) Depending on the type, with two voltages

Types of protection

Type of protection: EEx de I, EEx de IIB T3, Exd I / II BT 3
Level of protection: IP 44-54

Certification

BVS 91.C.1203 X, BVS 91.C.2054
KDB 93.115 W